

ORDRAN

ARCHITECTURAL POOL SYSTEMS

LINEAR

LONG-FORMAT FRAMED ARCHITECTURAL POOL

A long-format framed configuration for residential, villa, hospitality and compact lap-pool applications, with a large tempered-glass viewing window.

EXTERNAL

11.8 x 2.2 x 1.5 m

Documented configuration

INTERNAL

11.0 x 2.0 x 1.4 m

Water-body size

WINDOW

2.0 x 1.4 m

Tempered glass

BASE

C25 $\geq$ 150 mm

Level tolerance $\leq$ 3 mm/m

Illustrative imagery. Final configuration follows approved project documents.




TECHNICAL CONFIGURATION

LINEAR project geometry + construction


WPC exterior cladding + galvanized-steel frame + seamless FRP liner + large tempered-glass viewing window.

PLAN / GEOMETRY

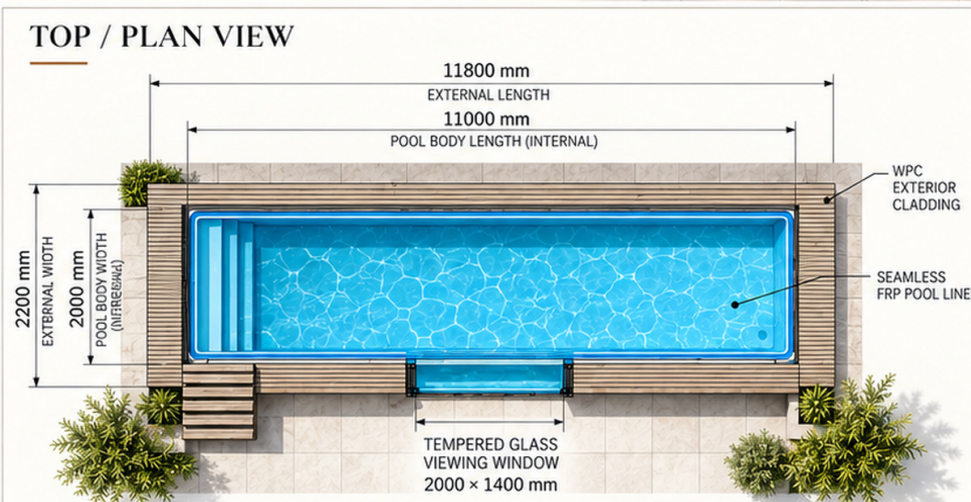

CONSTRUCTION / INTERFACE

CONSTRUCTION / BASE DETAIL

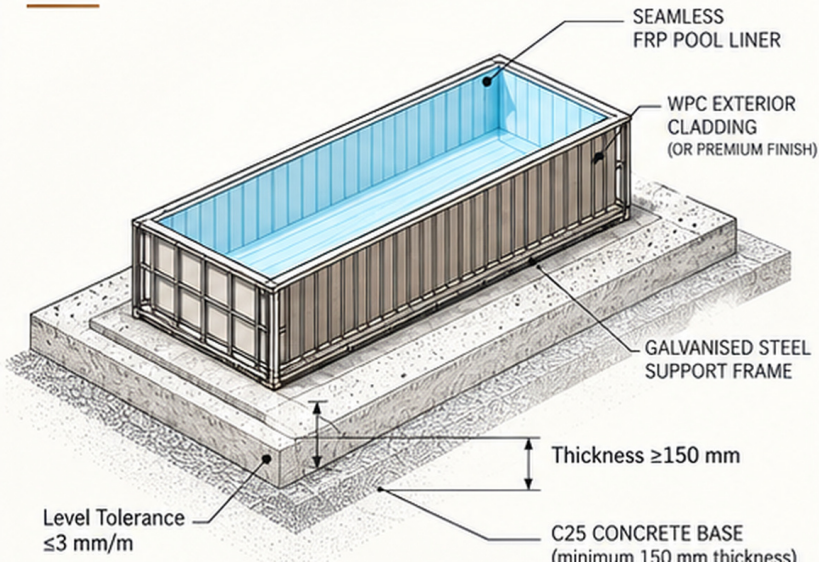

EXTERNAL

11.8 x 2.2 x 1.5 m

Documented configuration

INTERNAL

11.0 x 2.0 x 1.4 m

Water-body size

WINDOW

2.0 x 1.4 m

Tempered glass

BASE

C25 ≥ 150 mm

Level tolerance ≤ 3 mm/m

PROJECT CONTROL

Lift from the steel frame only. A 24-hour full-water leakage check is required after positioning and local service connection before commissioning.

Configure the system around the actual project.

CONSTRUCTION

Construction family

WPC exterior cladding + galvanized-steel frame + seamless FRP liner + large tempered-glass viewing window.

PROJECT CONTROL

Geometry + interfaces

Lift from the steel frame only. A 24-hour full-water leakage check is required after positioning and local service connection before commissioning.

OPTIONS

Water + feature pathways

Filtration, heating/cooling, salt / UV / ozone / automatic-pH pathways, covers, counter-current and selected architectural options are frozen against the final project schedule.

SUPPLY-ONLY

Local project responsibilities

Foundations, retaining, drainage, lifting, installation, electrical / plumbing connections, barriers, approvals and commissioning remain local responsibilities unless expressly included.

OPEN RELEASE ITEM

Dry weight, packed dimensions, lift points / centre of gravity and preferred freight method remain to be frozen in the final release pack.

Brief. Configure. Resolve. Release.

Use the ORDRAN Project Brief to freeze the pool around the architecture, water experience, destination and local-project interfaces.

01

BRIEF

Dimensions, intended use, project type, edge / window intent and destination.

02

CONFIGURE

Geometry, construction family, equipment, finish and option pathways.

03

RESOLVE

Approved drawings, hydraulics, logistics, local interfaces and release evidence.

04

RELEASE

Production, QA, packing and project documentation against the approved configuration.

ORDRAN SUPPLY

Configured product package and supporting documentation for the supplied scope. Project review is remote from client / local-team-supplied drawings, photos, dimensions, access information and destination details.

LOCAL PROJECT TEAM

Foundations, lifting, installation, utilities, barriers, local engineering, approvals and commissioning unless expressly included in the written quotation.

sales@apollonzglobal.com | apollonzglobal.com