

APOLLO NZ GLOBAL


INDUSTRIAL & LOGISTICS INFRASTRUCTURE

PACKAGE A / PRELIMINARY SCOPE

STANDARD WAREHOUSE LOADING BAY

General goods receiving and dispatch. A coordinated starting scope rather than isolated door purchases.

COORDINATED LOADING-BAY CONCEPT

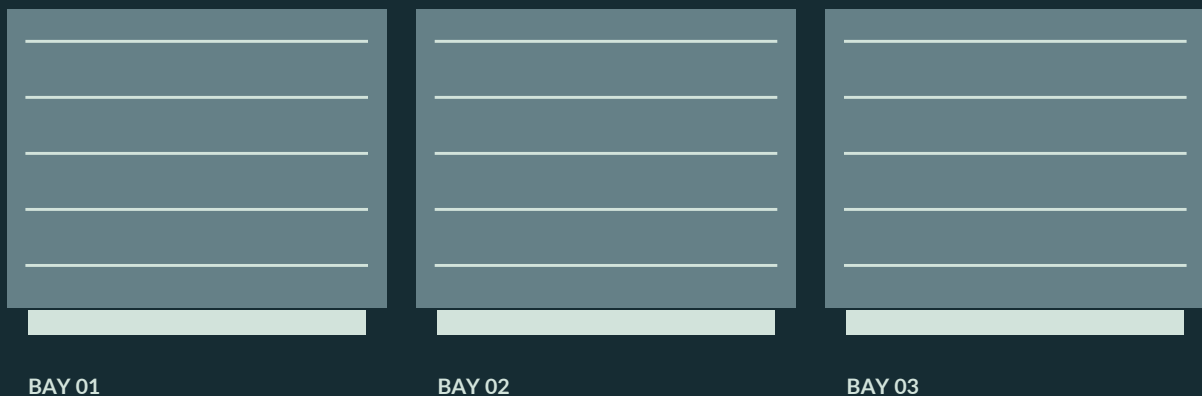

DOOR / LEVEL INTERFACE / WEATHER SEAL / SAFETY

PROJECT PLANNING / TECHNICAL VALIDATION REQUIRED

OCTOBER 2026

PACKAGE A / PROJECT CONFIGURATION

Standard Warehouse Loading Bay

Provisional equipment scope, design inputs and evidence requests for purchaser / architect / contractor review.

APPLICATION

Suitable for

Conventional warehouse docks, logistics yards and industrial building developments.

Indicative equipment scope

- Suitable industrial sectional or roller door
- Dock leveller selected for actual truck and forklift loads
- Appropriate shelter or seal and dock bumpers
- Control station, traffic signals and restraint options

Project decision inputs

- Door opening, dock level and truck-bed height range
- Forklift plus pallet/goods loading and wheel loads
- Wind and corrosion exposure, daily usage and site access
- Power, safety sequence, operator and project stage

Manufacturer evidence requested

- Door sections, wind evidence and control options
- Leveller rated load basis and pit/load drawings
- Shelter sizing and mounting instructions
- Electrical/control diagrams, manuals and spares

Local project interfaces

- Civil pit, concrete, drainage and dock structure
- Electrical and control installation, safety risk assessment
- Local commissioning, training and approvals
- Freight, unloading and post-delivery handling

PROJECT STATUS: preliminary specification pathway only. The final bill of materials, components, capacities, tested standards, drawings, installation scope, warranty and destination suitability require documented approval. Apollo NZ Global supplies equipment; it does not perform local installation.